



US 20170101993A1

(19) **United States**(12) **Patent Application Publication**
KANG et al.(10) **Pub. No.: US 2017/0101993 A1**(43) **Pub. Date: Apr. 13, 2017**(54) **TURBOFAN FOR AIR CONDITIONING APPARATUS**(71) Applicant: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)(72) Inventors: **Yong-hun KANG**, Seoul (KR);
Eung-ryeol SEO, Suwon-si (KR);
Jin-baek KIM, Suwon-si (KR);
Hyun-joo KIM, Suwon-si (KR)(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)(21) Appl. No.: **15/283,651**(22) Filed: **Oct. 3, 2016**(30) **Foreign Application Priority Data**

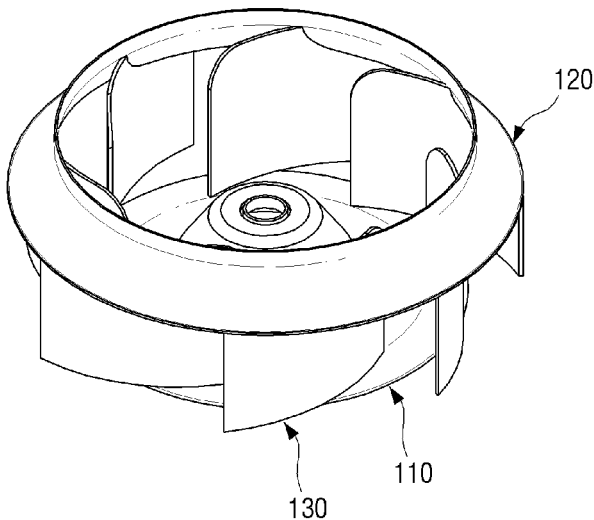
Oct. 7, 2015 (KR) 10-2015-0141189

Publication Classification(51) **Int. Cl.****F04D 17/16** (2006.01)**F04D 29/42** (2006.01)**F01D 5/14** (2006.01)**F04D 25/06** (2006.01)(52) **U.S. Cl.**CPC **F04D 17/16** (2013.01); **F04D 25/06**(2013.01); **F04D 29/4226** (2013.01); **F01D****5/141** (2013.01)

(57)

ABSTRACT

A turbofan for an air conditioning apparatus includes a shroud at a center of which a suction port is formed; a hub plate which is spaced apart in a vertical direction from the shroud and has a diameter smaller than a diameter of the suction port; and a plurality of blades provided between the hub plate and the shroud in a circumferential direction, wherein a portion of each of the plurality of blades which faces the suction port of the shroud is formed in a curved portion inclined with respect to the hub plate, and an outer circumference of the hub plate is provided with a plurality of notches each of which is formed between adjacent two blades among the plurality of blades.

100100